

(71-284 liters/hour)

AQUA WHISPER PRO

- Automatic FWF on frame
- Small footprint
- Automatic shutdown option
- Robust, fail-safe design



For the hands-on boater

The Aqua Whisper Pro watermaker is suited for charter, offshore fishing, and ocean cruising. It's traditional manual functions and touch-pad control panel allows simple operation and digital + ana-

log instrumentation for redundancy. The Aqua Whisper Pro's high pressure pump is engineered to be quieter than conventional high pressure pumps, and operates for 2,500 hours before any maintenance is required.




Modular Configuration



Specifications & Dimensions - AQUA WHISPER PRO

AQUA WHISPER PRO

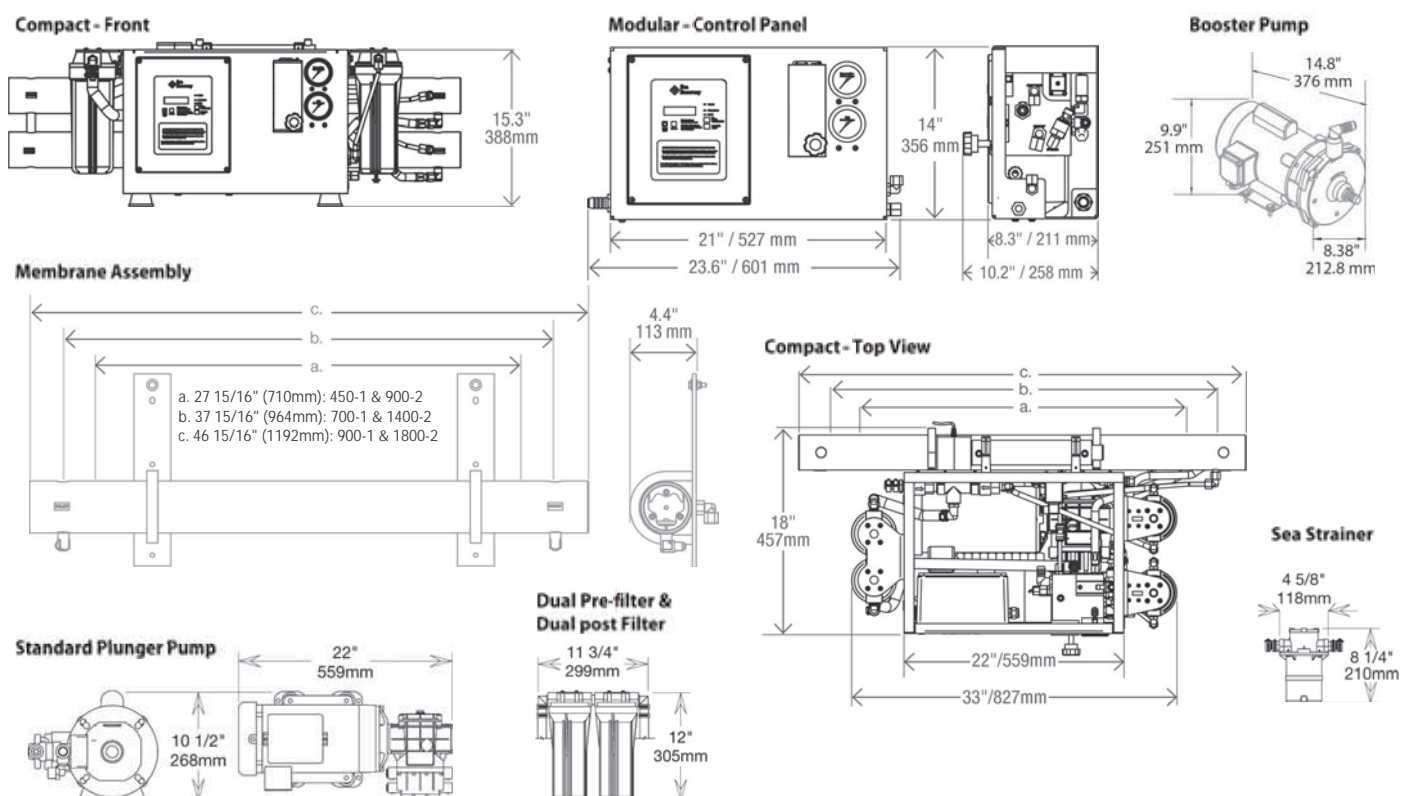

Specifications - AQUA WHISPER PRO

	Model	Production / hr	Production / 24 hrs	AW PRO compact*	AW PRO compact*
PRODUCTION & WEIGHT	450-1	71 liter	1,703 liter	71 kg	71 kg
	700-1	110 liter	2,650 liter	73 kg	73 kg
	900-1	142 liter	3,407 liter	73 kg	73 kg
	900-2	142 liter	3,407 liter	77 kg	77 kg
	1400-2	221 liter	5,300 liter	79 kg	79 kg
	1800-2	284 liter	6,814 liter	82 kg	82 kg

ELECTRICAL

ELECTRICAL	Phase	Pump Motor	Voltage VAC	Hz	Normal Operating Amps	Start Up Current
PLUNGER PUMP	Single	High Pressure / Booster	110-115 / 220-230	50 / 60	110 / 220 30 / 15	110 / 220 100 / 50
	Three	High Pressure / Booster	220-230 / 380-460	50 / 60	220 / 380-440 11 / 5.5	220 / 380-460 30 / 15

Circuit Breaker Size	Operating AC Voltage	Phase	Recommended circuit breaker
PLUNGER PUMP	110-115 / 220-230	Single	40 Ampere / 20 Ampere
	220 / 380 / 460	Three	15 Ampere / 10 Ampere / 10 Ampere